


# ZHV-0415L/S Solenoid Valve

ISO/TS16949 ISO9000 ISO14000  
RoHS REACH CE UL VDE TÜV

类型：二位二通 TYPE:Two position two way

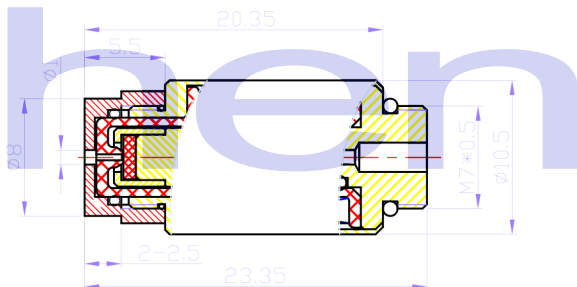


总重量 Total Weight: 9g  
应用范围：宠物喷雾器等  
APPLICATION: pet sprayer

单位:mm Units:mm

## 综合特性 GENERAL FEATURES

1. 常用压力:0~3600mmHg/0~5Bar  
Pressure:0~3600mmHg/0~5Bar
2. 最小口径:  $\square$ 0.4mm  
Min Orifice:  $\square$ 0.4mm
3. 流体介质:空气等  
Fluid medium: Air
4. 寿命:典型值为5万次 (on 0.35s, off 0.85s)  
Lify cycle: 50, 000 cycles (on 0.35s, off 0.85s)
5. 绝缘等级: B类  
Insulation class:class B



## COIL DATA线圈资料

工作周期(%) = $\frac{\text{工作时间}}{\text{工作时间} + \text{断开时间}} \times 100\%$ Duty cycle(%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$	间断 Or less 30%	间断 Or less 20%	间断 Or less 10%
最大工作时间(秒) MAX. "on" time in seconds	55	19	3
瓦特(W) (20℃) Watts at 20℃	4.8	9.6	24
安匝数AT (20℃) Ampere-turns at 20℃	615	864	1368


型号 Type no.

阻值(20℃)  
Resistance  
( $\Omega$ )  $\pm 10\%$

线圈匝数  
No. Turns

电压(VDC)  
Voltage DC

ZHV-0415L-XX A XX

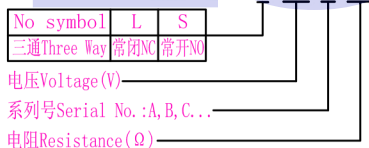

型号 Type no.	阻值(20℃) Resistance ( $\Omega$ ) $\pm 10\%$	线圈匝数 No. Turns	电压(VDC) Voltage DC
ZHV-0415L-XX A XX	4	325	6 8.5 12 19
	10	514	12 17 24 38
	12	550	24 34 48 76
	24	805	48 68 96 152