

## ZHI-1327 Electromagnet

ISO/TS16949 ISO9000 ISO14000  
RoHS REACH CE UL VDE TÜV




总重量 Total Weight: 24g  
应用范围:  
APPLICATION:Toster

型号 Type no.

ZHI-1327E-XX A XX

E 通电吸E lectromagnet  
P 永磁吸Permanent magnet  
电压Voltage(V)  
系列号Serial No.:A,B,C...  
电阻Resistance(Ω)

类型: 通电吸合 TYPE:ENERGIZED SUCKER

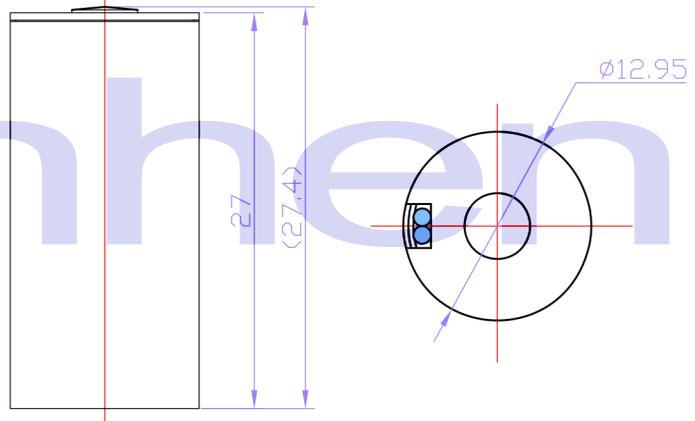

PERFORMANCE PROMETER 性能参数


单位:mm Units:mm

工作周期(%) = $\frac{\text{工作时间}}{\text{工作时间}+\text{断开时间}} \times 100\%$ Duty cycle(%) = $\frac{\text{"ON" time}}{\text{"ON" time}+\text{"OFF" time}} \times 100\%$	连续 Continuous 100%	间断 Or less 50%	间断 Or less 25%	间断 Or less 10%
最大工作时间(秒) MAX. "on" time in seconds	∞	30	10	3
瓦特(W) (20°C) Watts at 20°C	0.6	1.5	2.4	6
保持力 holding force(gf)	300	500	800	1200

电吸铁ZHI

## ZHI-0626L Electromagnet

ISO/TS16949 ISO9000 ISO14000  
RoHS REACH CE UL VDE TÜV

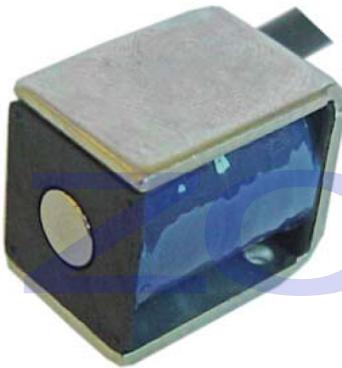


总重量 Total Weight: 23g  
应用范围:  
APPLICATION:Toster

型号 Type no.

ZHI-0626E-XX A XX

E 通电吸E lectromagnet  
P 永磁吸Permanent magnet  
电压Voltage(V)  
系列号Serial No.:A,B,C...  
电阻Resistance(Ω)

类型: 通电吸合 TYPE:ENERGIZED SUCKER

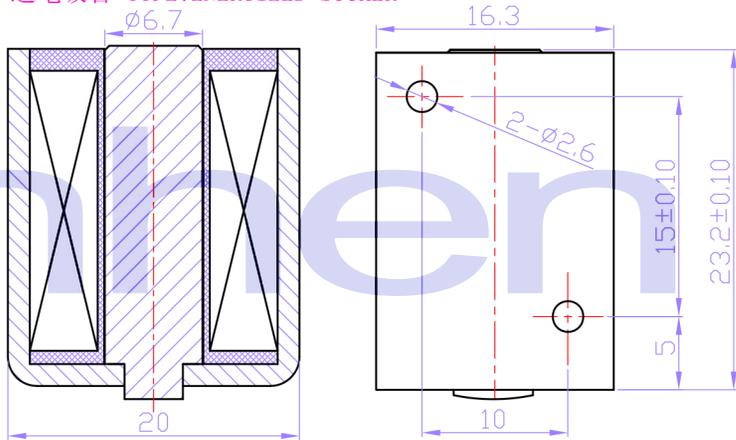

PERFORMANCE PROMETER 性能参数

单位:mm Units:mm

工作周期(%) = $\frac{\text{工作时间}}{\text{工作时间}+\text{断开时间}} \times 100\%$ Duty cycle(%) = $\frac{\text{"ON" time}}{\text{"ON" time}+\text{"OFF" time}} \times 100\%$	连续 Continuous 100%	间断 Or less 50%	间断 Or less 25%	间断 Or less 10%
最大工作时间(秒) MAX. "on" time in seconds	∞	30	10	1
瓦特(W) (20°C) Watts at 20°C	1.8	2.2	4.4	11
保持力 holding force(gf)	200	350	600	900